


seko

Invikta

Solenoid driven dosing pumps

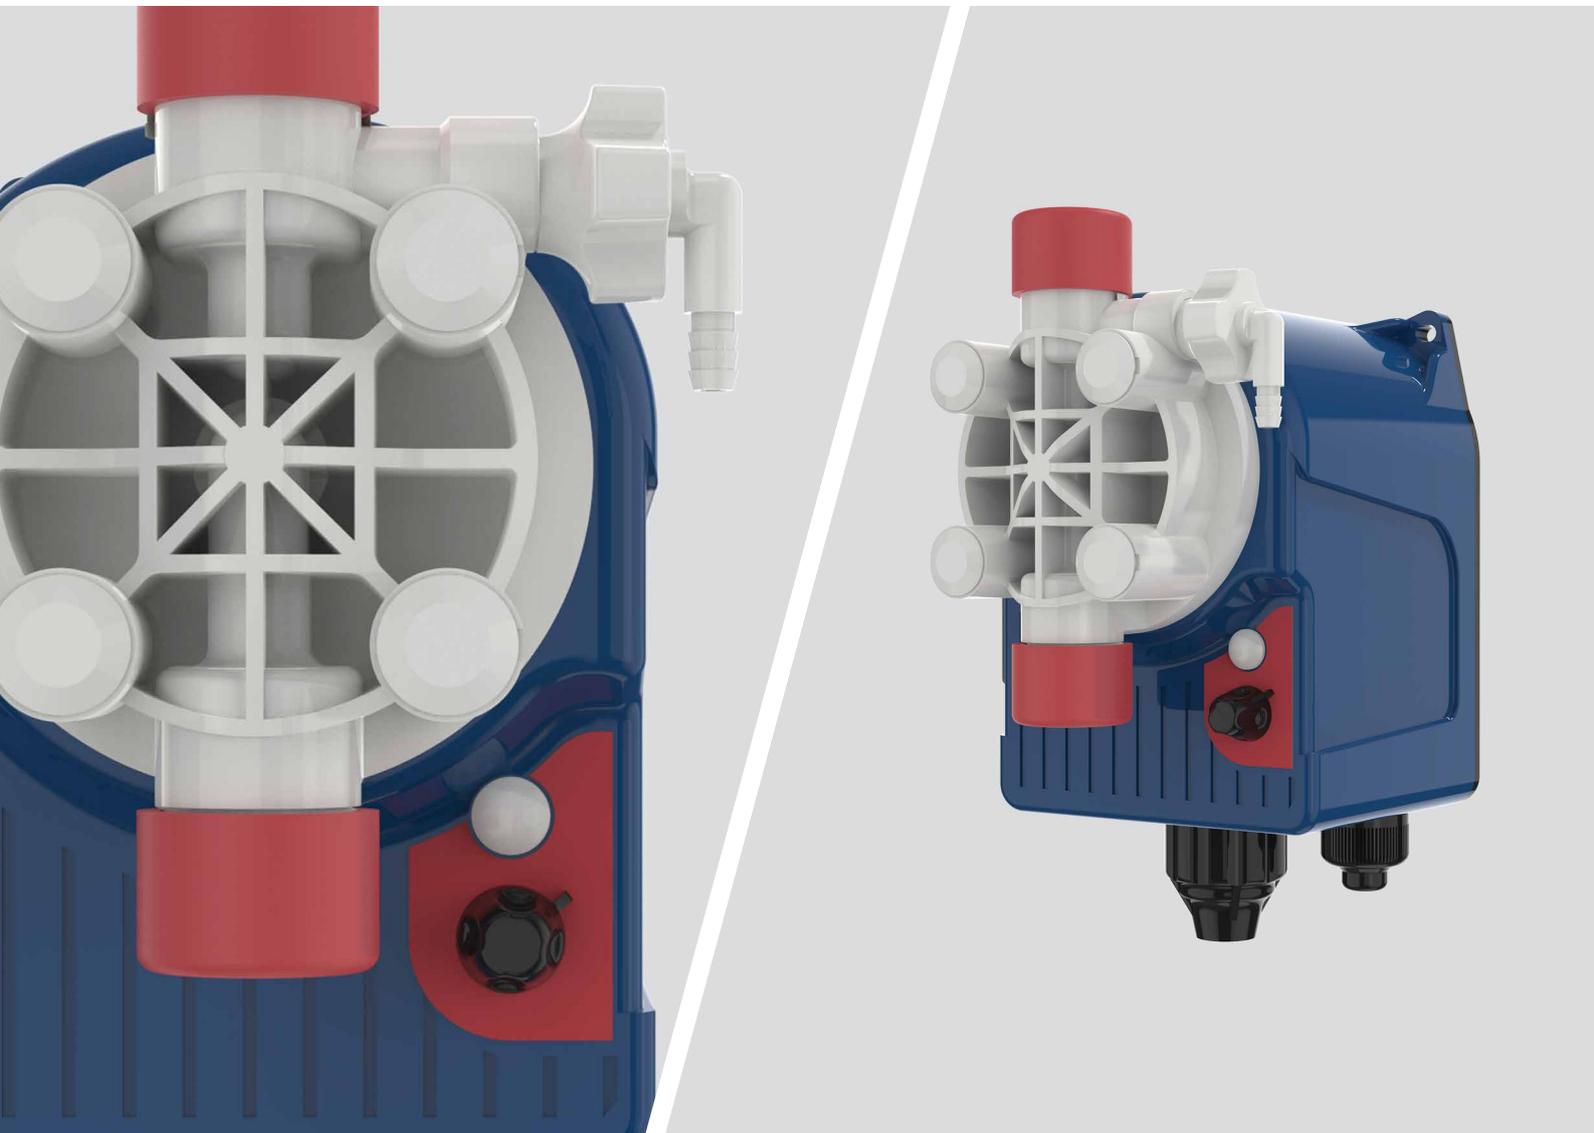

Your Choice,
Our Commitment

info@createflow.cz
www.createflow.cz

Create Flow s.r.o.

tel: 00420 722 712 652

Adaptability and performance in a small package

The Invikta series are compact solenoid driven dosing pumps with outstanding flexibility and adaptability for even larger water treatment applications

While Invikta may be the entry level to SEKO's range of solenoid driven dosing pumps, it still brings with it great reliability, quality construction and flexibility in the number of applications where it can work, such as: OEMs, Swimming Pools, Car Wash, Cooling Towers, Reverse Osmosis Systems and many other applications.

PVDF pump head and ceramic ball valve as standard

As with the rest of SEKO's products Invikta, uses premium materials in its manufacture. The pump head is optionally available in PVDF and but the ball valves are ceramic as standard further enforcing the reliability of the pump and assures the chemical compatibility with all the wetted parts.

Long life diaphragm tested to give "Five Year" working life

SEKO's diaphragms are made of pure solid PTFE offering a superior life expectancy guaranteed by SEKO for 5 years, making routine replacement no longer necessary, making this essential pump a great entry point into the SEKO range.

The range also features

- External plastic enclosure is in PP which comes with IP65 class protection against jets of water and aggressive environments.
- Wall mounting: can be mounted directly on wall or with a fixing bracket
- Pump head with manual priming valve
- Operation State LED: Flashing when operating Slow flashing when pump stops Fast flashing when low level alarm is activated
- Flow rate manual adjustment from 0 (operation stop) to 100% of max. flow rate
- Standard 90-265 VAC power supply (20-60 VAC upon request)
- A low-level alarm can be requested as an optional extra



Analogue dosing pump with constant dosage Invikta KCS

Constant flow rate manually adjustable by control dial on the front panel, Power-ON led indicator.

631

Model

with flow rate 2 l/h
and pressure 5 bar

632


Model

with flow rate 7 l/h
and pressure 2 bar

633

Model

with flow rate 5 l/h
and pressure 5 bar

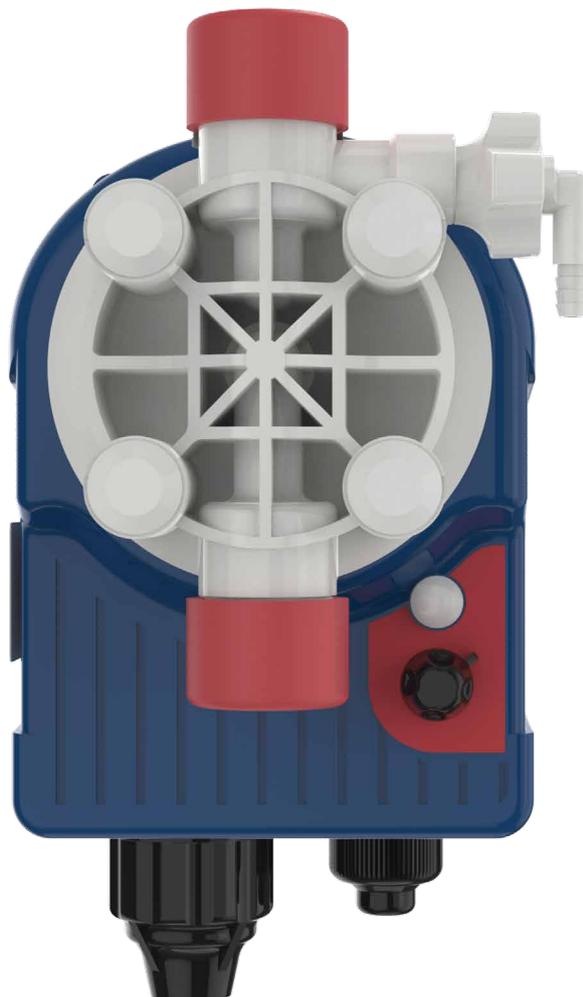

Your Choice, Our Commitment

In the modern Globalised world, being a privately owned Company has significant benefits especially for our Customers, our Partners. For over 40 years, SEKO has developed a Global organisation able to take the longer view, manage the pressure of the now, and to plan for the long term, delivering true Partnership for our Customers, with transparency and mutual respect for each other.

Whether it's for our renowned flexibility, our attention to detail, the high-quality products, or just the way we do business, we understand that it's Your Choice to do business with us. It is Our Commitment to fulfill your needs wherever you, our Customers are.



For more information about our portfolio, worldwide locations, approvals, certifications, and local representatives, please visit www.seko.com

SEKO reserves the right to amend and change specifications without prior notice. All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement. Published data may be subject to change.

© 2019 SEKO, Layout and origin: UK, 850001 INVFLY EN V01

info@createflow.cz
www.createflow.cz

Creare Flow s.r.o.

tel: 00420 722 712 652